

COMMAND LIGHT

DON'T GET CAUGHT IN THE DARK

BIG SOLUTIONS FOR SMALL BUDGETS

Firefighters have many obstacles ... seeing shouldn't be one of them. And yet many responders battle the dark because the department's apparatus isn't equipped with a light tower. Now there's no reason to eliminate this essential lighting thanks to the Helios LED, developed specifically for Command Light by the FireTech team and HiViz LED Lighting. These LEDs shave the cost of a new light by 33% while delivering a 14,000 lumen output per fixture. And all so you don't have to get caught in the dark.

HELIOS

A COMMAND LIGHT EXCLUSIVE
FIRETECH LED, AVAILABLE ON ...

ELEVATE YOUR SCENE LIGHTING
AT COMMANDLIGHT.COM/HELIOS.

**KNIGHT
SERIES**



**SHADOW
SERIES**



**STRAIGHT
SHADOW**




C-LITE



**PLUS
RETROFITS!**

COMMANDLIGHT.COM | 3842 Redman Dr. Fort Collins, CO 80524 | 800-797-7974

HELIOS

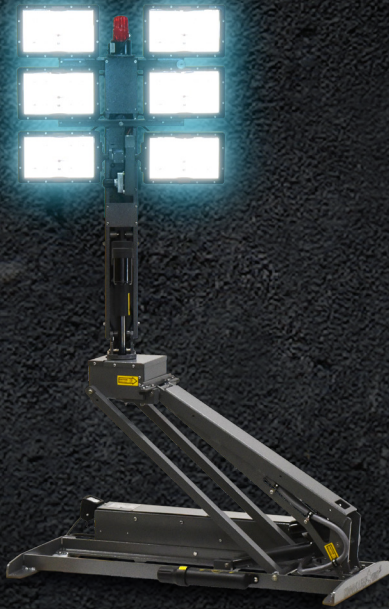

MEET THE HELIOS LINEUP

KNIGHT SERIES

MID-SIZE SERIES

Command Light's mid-size tower delivers a reach of nearly 7.5' from its base.

STRAIGHT SHADOW

ELEVATE / NO ROTATION

Maintain efficient, elevated scene lighting with a 3.5' reach without rotation.

SHADOW SERIES

VERSATILE REACH

This series offers a reach of 4.5', or an additional 6.5' with optional arm.

C-LITE

COMMAND LIGHT'S MOST COMPACT LIGHTING

Great for command units, this compact light offers rotation and 120° of tilt.

KNIGHT SERIES



7.5' \cup 360°

OF HEADS: 6

AC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
KL415A-CH	Helios 60w	115V or 230V AC 660w	14,000 lumens	84,000 lumens	12" x 47" x 34" 305 mm x 1,195 mm x 865 mm	87.5" x 52" x 34" 2,225 mm x 1,320 mm x 865 mm	165 lbs 75 kg
DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
KL415D-CH	Helios 60w	12V DC - 55 amps 660w	14,000 lumens	84,000 lumens	12" x 47" x 34" 305 mm x 1,195 mm x 865 mm	87.5" x 52" x 34" 2,225 mm x 1,320 mm x 865 mm	165 lbs 75 kg

SHADOW SERIES



4.5'-6.5' \cup 355°

OF HEADS: 4

AC/DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SL442A-CH	Helios 60w	12V DC - 115V or 230V AC 420w	14,000 lumens	56,000 lumens	8" x 54" x 34" 205 mm x 1,375 mm x 865 mm	55" x 36" x 34" 1,395 mm x 915 mm x 865 mm	75 lbs 35 kg
DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SL442D-CH	Helios 60w	12V DC - 35 amps 420w	14,000 lumens	56,000 lumens	8" x 54" x 34" 205 mm x 1,375 mm x 865 mm	55" x 36" x 34" 1,395 mm x 915 mm x 865 mm	75 lbs 35 kg



4.5'-6.5' \cup 355°

OF HEADS: 2

AC/DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SL422A-CH	Helios 60w	12V DC - 115V or 230V AC 300w	14,000 lumens	28,000 lumens	8" x 54" x 34" 205 mm x 1,375 mm x 865 mm	55" x 36" x 34" 1,395 mm x 915 mm x 865 mm	70 lbs 32 kg

STRAIGHT SHADOW



3.5' \cup 0°

OF HEADS: 2

AC/DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SS322A-CH	(2) Helios 60w	12V DC - 115V or 230V AC 240w	14,000 lumens	28,000 lumens	9" x 42" x 30" 230 mm x 1,065 mm x 762 mm	42.5" x 45" x 30" 1,080 mm x 1,143 mm x 762 mm	45 lbs 20 kg
DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
SS322D-CH	(2) Helios 60w	12V DC - 20 amps 240w	14,000 lumens	28,000 lumens	9" x 42" x 30" 230 mm x 1,065 mm x 762 mm	43" x 45" x 30" 1,092 mm x 1,143 mm x 762 mm	45 lbs 20 kg

C-LITE



2' \cup 355-365°

OF HEADS: 1

DC	LIGHTING	POWER REQUIREMENTS	OUTPUT (PER LIGHT)	TOTAL OUTPUT	HXWXD (NESTED)	HXWXD (UPRIGHT)	WT.
CD113D-CH	(1) Helios 60w	12V DC - 12 amps 140w	14,000 lumens	14,000 lumens	9" x 14" x 19" 229 mm x 355 mm x 483 mm	21" x 14" x 19" 533 mm x 355 mm x 483 mm	30 lbs 14 kg